

162-65.B

NO 092003509 A  
MAR 1992INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>5</sup> :</b>  <b>D21C 9/14, 9/153, 9/16</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 92/03609</b>  <b>(43) International Publication Date:</b> 5 March 1992 (05.03.92)
<b>(21) International Application Number:</b> PCT/US91/05834 <b>(22) International Filing Date:</b> 14 August 1991 (14.08.91) <b>(30) Priority data:</b> 567,409                      14 August 1990 (14.08.90)                      US <b>(71) Applicant:</b> INTERNATIONAL PAPER COMPANY [US/US]; Corporate Research Center, Long Meadow Road, Tuxedo, NY 10987 (US). <b>(72) Inventor:</b> TSAI, Ted, Yuan ; 11 Berwynn Road, Harriman, NY 10926 (US). <b>(74) Agents:</b> HODGES, Paul, E. et al.; Luedeka, Hodges, Neely & Graham, 1030 First American Center, Knoxville, TN 37902 (US).		<b>(81) Designated States:</b> AT (European patent), BE (European patent), CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FI, FR (European patent), GB (European patent), GR (European patent), IT (European patent), JP, LU (European patent), NL (European patent), SE (European patent).  <b>Published</b> <i>With international search report.</i>
<b>(54) Title:</b> BLEACHING CHEMICAL PULP USING CHLORINE/CHLORINE DIOXIDE THEN OZONE  <b>(57) Abstract</b>  <p>The present invention provides for improvements in the preparation of chemical cellulosic wood pulp for use in papermaking, and specifically to enhancement of the quality of a kraft pulp which has been subjected to a chlorine dioxide/chlorine bleaching stage and thereafter subjected to ozonation prior to an extraction stage in the bleaching sequence. The improved pulp of the present invention exhibits reduced total organically bound chlorine residues in the wood pulp and adsorbed organic halides (AOX) in the effluent, and has good brightness and viscosity. The advantages of the present invention may be accomplished by means of a bleaching sequence that employs a minimum of stages, namely (D→C)ZED or D<sub>c</sub>ZED with attendant relatively lower capital investment than heretofore possible.</p> <div style="text-align: center; margin-top: 20px;"> <p>(D→C) - Z - E - D</p> <p>D<sub>c</sub> - Z - E - D</p> </div> <div style="text-align: right; margin-top: 20px;"> <p>"C → FACTOR"</p> <p>E<sub>c</sub> E<sub>y</sub> E<sub>op</sub></p> </div>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MN	Mongolia
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GN	Guinea	NL	Netherlands
BJ	Benin	GR	Greece	NO	Norway
BR	Brazil	HU	Hungary	PL	Poland
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LI	Liechtenstein	SU <sup>+</sup>	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TC	Togo
DE*	Germany	MC	Monaco	US	United States of America
DK	Denmark				

<sup>+</sup> Any designation of "SU" has effect in the Russian Federation. It is not yet known whether any such designation has effect in other States of the former Soviet Union.

BLEACHING CHEMICAL PULP USING CHLORINE/CHLORINE DIOXIDE THEN OZONEField of the Invention

The present invention relates to delignification and bleaching of chemical cellulosic wood pulp fibers for use in papermaking and to the production of a pulp having  
5 reduced halogen concentrations, and good brightness and viscosity.

Background of the Invention

Chlorine-based chemicals, such as chlorine, chlorine dioxide, and hypochlorite, have been used in pulp  
10 bleaching for several decades, and continue to be used for removing lignin and bleaching the pulp to high brightness. In general terms, the extent of bleaching, hence the degree of brightness obtained, is determined by the type of pulp being bleached and the proposed end use of the paper  
15 product. For example, kraft pulps intended for use in making fine writing papers require different bleaching circumstances which will produce the desired brightness in the final paper product. In all instances, however, where chlorine-based bleaching agents have been employed in the  
20 prior art, there are produced chlorinated organics and organic halogens (i.e. chlorides). The compounds are generally insoluble in an aqueous medium and substantial quantities are swept from the pulp with the effluent from one or more of the stages of the bleaching sequence. A relatively  
25 smaller percentage of such chlorinated organics and organic chlorides remain in the pulp and eventually appear in the paper product.

In chlorine-based bleaching processes, the "C" factor of the pulp is employed as a measure of the chlorination charge required for a specific pulp. By definition,  
30 the "C" factor refers to the effective chlorination charge and is equal to the chlorine dioxide plus the chlorine in the charge (expressed in terms of effective chlorine), divided by the Kappa number of the pulp. Generally, it is

stated in the prior art that higher "C" factors produce brighter pulps, but that a "C" factor of 0.22 provides maximum brightness in a pulp without unacceptable degradation of the cellulosic fibers (e.g. reduced strength).  
5 Thus, it has been common heretofore when seeking maximum brightness of the pulp, (in the range of 70-85% GE) to use large "C" factors, i.e. larger quantities of chlorine-containing bleaching agent. Invariably such quantities of chlorine result in presently undesirable or unacceptable  
10 levels of chlorinated organics and/or organic chlorides.

In the past decade, there has been a growing concern about the environmental impact of chlorinated organic compounds in bleach plant effluent. Also, public concern for the disposal of paper containing organically bound  
15 chloride has been increasing. Undesirable chlorinated organics such as dioxin have been detected in the exhaust gases of incinerators burning municipal wastes containing chloride, including, for example, paper products made from chlorine bleached pulps. West German environmental regula-  
20 tions, for example, propose restricting the total chloride residue for packaging material including wood pulp to less than 200 ppm. The allowable adsorbed organic halogens (AOX) discharged in the effluent per ton of wood pulp are proposed to be restricted to 2.0 kg or less in some of the European  
25 countries. More stringent regulations are expected in the near future.

Several options have been proposed or practiced to reduce or eliminate chlorinated organics in the bleaching process. The most straightforward method is to substitute  
30 non-chlorine bleaching chemicals, such as oxygen, peroxides, ozone, peracetic acid, etc. for chlorine-based bleaching chemicals. Unfortunately, no chlorine-free bleaching process has been developed with the ability to produce acceptable pulp properties (such as brightness or viscosity) at an  
35 acceptable bleaching cost.

Another option to reduce the discharge of chlorinated organic compounds is to reduce the chlorine usage in

the first stage of the bleaching process. Two alternatives that produce no significant degradation of pulp properties have been commercialized for this purpose. These are (a) extended delignification in the cooking stage and (b) oxygen delignification. These alternatives, with proper extraction, reduce the lignin content of brown stock going into the bleach plant. They do not, however, reduce the chlorinated organic compounds in the bleached pulp and effluent to sufficiently low levels.

10 A third option to reduce the generation of chlorinated organics in a bleaching process is to substitute chlorine dioxide for chlorine. Chlorine dioxide is a relatively strong oxidant compared to chlorine; to achieve the same degree of delignification, it requires only about  
15 thirty-eight weight percent chlorine dioxide on the pulp compared with one hundred weight percent of chlorine. However, these prior art processes are of the DEDED type wherein the chlorination stage (D) is followed by the conventional extraction (E) and additional chlorination (D)  
20 stages. The pulp and the discharge effluents resulting from this prior art option contain higher concentrations of chlorinated organics than are acceptable and/or desirable. Processes using both oxygen delignification and chlorine dioxide substitution have been suggested but do not achieve  
25 the regulated concentrations of chlorine-containing residues in either the pulp or the effluent.

#### Summary of the Invention

The present invention comprises a method for the treatment of kraft pulp in preparation for its use in paper-making including the steps of

30 contacting the pulp while dispersed in an aqueous medium with an initial charge of a chlorine-based bleaching agent selected from the group consisting of chlorine dioxide, and mixtures of chlorine dioxide and chlorine, wherein the total chlorine  
35 dioxide present in the charge represents between about 100% and about 50% of the total charge,

5 expressed as effective chlorine, the remainder of the charge being chlorine, the bleaching agent producing a substantial quantity of chlorine-containing moieties that are insoluble in an acid medium,

10 thereafter, and prior to any intervening treatment of said pulp other than a wash, contacting the pulp with ozone, the ozone being present in an amount which provides a ratio of "C" factor to % ozone, based on dry weight of pulp, of between about 0.03 and about 0.6 for a period of time sufficient to cause the ozone to oxidize substantial quantities of the chlorine-containing moieties and render the same soluble in the acid  
15 medium of the pulp, and

thereafter, separating the solubilized chlorine-containing moieties from the pulp,

20 whereby there is obtained a pulp having substantially lower chlorine content, essentially no tetrachlorodibenzodioxin, essentially no tetrachlorodibenzofuran, and substantially equivalent brightness and viscosity as the same pulp which has been bleached employing conventional chlorine-based bleaching sequences,

25 a cellulosic kraft pulp suitable for papermaking purposes, the pulp being bleached through the use of chlorine dioxide or a mixture of chlorine dioxide and chlorine, being essentially free of tetrachlorodibenzodioxin or tetradibenzofuran,  
30 having a total organic chloride content of less than about 200 ppm, based on pulp, and having a total adsorbed organic halogen content of less than about 2 kg/ton, based on pulp.

In accordance with the method of the present invention, a chemical cellulosic wood pulp, e.g. a kraft pulp, is initially contacted with chlorine dioxide as the first-stage of a bleaching sequence. This chlorine dioxide may initially contain up to about 50% chlorine, based on effective chlorine, or in this initial bleaching stage, up to about 50% chlorine may be added to the chlorine dioxide as a substitute for the chlorine dioxide, also based on effective chlorine. Contrary to the prior art, after this initial D stage and prior to any extraction (E) stage, the pulp is processed through an ozonation stage. After the ozonation stage, the pulp is processed through the customary extraction, further bleaching, etc. stages. Importantly, and as noted to be contrary to the prior art, the ozonation takes place immediately following chlorination and prior to extraction. It has been recognized heretofore that ozone as a strong oxidant tends to degrade the pulp. Also, the art teaches that any use of ozone on pulp should be preceded with an acid wash, for example to remove heavy metals known to be harmful to the stability of ozone and/or decomposition products that may cause low pulp properties (e.g. strength). Contrary to such prior art, the present inventor has found that the ozonation can take place immediately following an initial chlorine dioxide/chlorine (D<sub>C</sub>) bleaching stage as defined hereinabove. In this regard, it is to be understood that preferably there is a conventional water washing of the pulp between the stages of the bleaching sequence. This washing is not deemed to be a "stage", but rather is in the nature of a dilution of the aqueous phase of the pulp. For example, the quantity of water commonly used provides a dilution factor of between about 1 and about 3. It has been found that the wash water need not be "clean" or "fresh" water. For example, recirculated water which contains considerable residues from previous usage has been used successfully.

Among the several unexpected advantages provided by the present method, it has been found that the ozone

treatment not only provides delignification and bleaching but also oxidizes substantial quantities of the chlorinated lignin residues left over from the chlorination stage. This oxidative activity converts substantial quantities of the insoluble chlorinated organics to inorganic chlorine-containing compounds and/or to chlorinated organics that are soluble in the acid liquor present in the ozonation stage. The oxidation of these chlorinated residues by the ozone thus not only reduces the chlorinated organic content in the wood pulp, but also reduces the adsorbed chlorinated organics discharged in the effluent. These converted inorganic chlorides, generally, are not environmentally hazardous and/or are recoverable. The result is a pulp having good brightness, acceptable viscosity, and reduced chlorinated organic content. Notably, such desirable results are obtained by employing as few as four stages in the bleaching sequence, and employing lower total effective chlorine charges in the chlorination stage than heretofore known to be possible.

Specifically, the present inventors, using their improved method, have produced wood pulp which has less than 200 ppm total organic chloride (TOCl) residue. TOCl as used herein refers to the total organically bound chlorine content of the pulp resulting from the bleaching sequence unless indicated otherwise. TOCl is essentially insoluble. The effluent discharge from the bleaching process of the disclosed method has less than 2.0 kg adsorbed organic halogens (AOX) per ton of wood pulp. AOX, as the term is used herein refers to the sum of the AOX, i.e. adsorbed organic halogens, of the several stages of bleaching, i.e. AOX of the D<sub>C</sub> stage plus AOX of the Z stage plus AOX of the E stage and plus AOX of further D stages, unless indicated otherwise. As noted, the pulp produced by the present invention has a brightness and viscosity that meet or exceed the requirements of industrial papermaking.

Therefore, it is an object of the present invention to provide a method for the preparation of kraft cellu-



losic wood pulp fibers for use in papermaking that can provide wood pulps with lowered residual chlorine content and effluents with lowered levels of adsorbed organic halides (AOX) while retaining or enhancing the characteristics of brightness and pulp viscosity within acceptable ranges.

It is another object of the present invention to provide such an improved method for bleaching kraft cellulosic pulp that is both economical and readily adaptable to the current papermaking industry. These and other objects will be recognized from the present description including the Figures.

#### Brief Description of the Figures

FIGURES 1-5 are graphic representations, computer-generated from mathematical models depicting the relationship of ozone charge and chlorination factor in obtaining various values of the brightness, viscosity and total chloride on pulp.

In accordance with the present invention, an aqueous slurry of cellulosic wood fibers as is commonly produced by conventional digestion means in the papermaking industry is processed through sequential stages of a bleaching operation. Softwoods, hardwoods or mixtures thereof may be processed employing the present invention. Following digestion, the slurry preferably is processed directly to the bleaching sequence disclosed herein. If desired, it may be subjected to such treatment as oxygenation, ozonation or other oxidation prior to entering the present sequence, but with attendant increased expense.

In the first stage of the present sequence, the pulp slurry is treated with a chlorine-based agent, i.e. chlorine dioxide or a mixture of chlorine dioxide and chlorine. Preferably in this stage the oxidant is principally chlorine dioxide. Consistent with the industry practices, the term, D, is employed to represent a bleaching stage employing chlorine dioxide. Herein,  $D_1$  is used to represent the first D stage of a sequence. The term  $D_C$ , represents a

stage employing chlorine dioxide plus chlorine. In such stage, the chlorine may be present in the chlorine dioxide, i.e. a mixture, or the chlorine dioxide may be first added to the pulp and after a brief time period the chlorine is added. The term D-C is at times used to represent this latter chlorine substitution, but herein, the term  $D_C$  is deemed to encompass both the mixture and the chlorine substitution procedures unless indicated otherwise.

Following the  $D_1$  stage, and with or without an intervening washing, the pulp of the present invention is processed through an ozonation stage, Z. Heretofore, it has been taught in the industry that ozone tends to be decomposed by certain of the heavy metal components of the pulp that conventionally are removed by an additional acid treatment stage that comprises subjecting the pulp to an acidic medium. In the present invention the pulp moves from the  $D_1$  stage which is an acidic stage directly to the Z stage without an acidic treatment stage. In the Z stage, the acid pulp is contacted with ozone in a reaction tower, for example, for a period of time and employing sufficient ozone to effect oxidation of substantial quantities of the chlorinated lignins and/or other chlorinated components of the pulp, in addition to the contribution of the ozone toward further delignification. Many of the oxidized chlorine-based moieties are soluble in the environment of the Z stage. Thus, these oxidized chlorine-based moieties are solubilized into the liquor and extracted from the pulp during washing following the Z stage. Other of the oxidized compounds are soluble in an alkaline solution such as is present in an E stage. Extraction with an alkaline medium following the Z stage thus serves to remove alkaline-soluble oxidized chlorine-based moieties from the pulp. As noted, a preferred complete sequence will include an extraction stage following the ozonation stage. Such extraction stage may be enhanced with oxygen,  $E_O$ , or peroxide,  $E_P$ , a combination of oxygen and peroxide,  $E_{O+P}$ , or other enhancer. The pulp may be further processed through any of several selected stages.

1/10/92  
EOP

Pref rably, the extraction stage is followed by a further bleaching stage. Chlorine dioxide, i.e. a D<sub>2</sub> stage is preferred as such further bleaching stage. As desired, washes may be employed between selected stages, e.g. between  
5 the E and D<sub>2</sub> stages.

To facilitate a further understanding of the invention, the following examples are given primarily for purposes of illustrating certain more specific details thereof.

10 Southern softwood kraft pulp with Kappa number of 32.3 and an initial viscosity of 30.3 cP was used as the wood pulp slurry for all of the following Examples except as otherwise noted. The series of Examples used various combinations of the following bleaching stages:

15 O stage: Prechlorination oxygen delignification was conducted in a reactor for 1 hr. at 85°C, with 3% sodium hydroxide, 40-80 psig oxygen pressure and 0.5% magnesium sulfate on the pulp at a consistency of 10%.

D<sub>C</sub> stage: In the sequential chlorine dioxide  
20 substitution stage, D→C, chlorine dioxide was added to the pulp and mixed; after 20 seconds, chlorine was added and the pulp was well mixed; this stage was conducted in a reactor for 40 min. at 50°C with a consistency of 3-10%. In those instances where the chlorine was present in the chlorine  
25 dioxide as a mixture, the chlorine was introduced simultaneously with the chlorine dioxide.

C stage: Chlorination was conducted in a reactor for 30 to 40 min. at 45°C with a consistency of 3%, with chlorine of the desired charge.

30 D stage: Chlorine dioxide addition was conducted at 50 to 70°C with a consistency of 10%;

Z stage: The ozone stage was conducted under a pH of about 2-5 at room temperature for 40 to 90 min. with a consistency of 1%; Example 34 was done under alkaline condi-  
35 tion at 34% consistency at pH 12.

E stage: Extraction was conducted for 60 min. at 70°C with a consistency of 10% and with desired sodium

hydroxide charge;

$E_o$  stage: Extraction enhanced with oxygen was conducted under conditions similar to the E stage with an initial oxygen pressure of 40-50 psig that was gradually  
5 reduced to 0 psig;

$E_p$  stage: Extraction enhanced with peroxide was conducted under conditions similar to the E stage with a 0.4-0.6% hydrogen peroxide charge;

$E_o + p$  stage: Extraction enhanced with oxygen and  
10 peroxide was conducted under conditions similar to the  $E_o$  stage with a 0.4% to 0.6% hydrogen peroxide charge;

Washings: The slurry was washed with distilled water in a screen box or funnel between each stage; the stage labeled (DZ) is a D stage followed immediately by a Z  
15 stage without intermediate washing.

#### EXAMPLES 1-5

Several prior art bleaching sequences employing procedures well known in the art were run on Southern pine softwood kraft pulp having a Kappa number of 32.3. These  
20 sequences employed the usual chlorine stages with and without chlorine dioxide substitution. The results are shown in Table I. As expected, good brightness and viscosity values were noted, except when an oxygenation stage was employed prior to chlorination (Example 3). This latter Example  
25 showed the deterioration of the pulp (low viscosity) that has been noted in the prior art. Of these Examples, only the D→C  $E_{o+p}$ DED produced significant reduction in the total chloride on the pulp, but such reduction was obtained only at the expense of two additional stages.

Table 1

Example	Bleaching Sequence	Chemical Charge (% on Oven Dried (OD) Pulp)				Total Chloride on Pulp (ppm)*	Organic Chloride on Pulp (ppm)	Pulp Brightness (GE %)	Pulp Viscosity (cP)	C Factor
1	D-CE <sub>o</sub> +pD	D-C	E <sub>o</sub> +p	D		220	190	86.1 (83.3)**	22.5	0.22
		1.66--2.9	3	0.8						
2	D-CE <sub>o</sub> +pDED	D-C	E <sub>o</sub> +p	D	D	195	150	88.5 (86.5)	20.8	0.22
		1.66--2.9	3	0.8	0.4	0.3				
3	OD-CE <sub>o</sub> +pD	D-C	E <sub>o</sub> +p	D		215	170	86.8 (84.8)	14.3	0.22
		1.15--2	3	0.7						
4	CE <sub>o</sub> D	C	E <sub>o</sub>	D		314	300	84.7 (80.3)	23.8	0.22
		7.25	4.35	0.7						
5	CEDED	C	E	D	E	345*	320	86.7 (83.0)	27.0	0.22
		7.25	4	0.7	0.5	0.5				

## Remarks:

\* Estimated by the sum of inorganic and organic chlorides

\*\* Reverted brightness (at 105°C for 1 hr).

\*\*\* Oxygen pulp with kappa number = 22.3, viscosity = 21.8 cP

EXAMPLES 6-13

In Examples 6-13 the pulp employed was the same as in Examples 1-5. Examples 6-13 involved bleaching sequences using an ozone bleaching stage. Table 2 shows the properties of the pulps of these Examples. Employing ozonation prior to chlorination, Examples 6, 7, 10 and 12, produced pulps of low brightness, except in Examples 7 and 12 where additional and costly extraction and chlorine dioxide stages were added. Examples 8 and 9 (DZED) where ozonation was employed after chlorination, produced pulps of good brightness and viscosity plus low total chloride on the pulp. Notably, Examples 8 and 9 (DZED) employed 20% and 7% less chlorine dioxide than Example 11 (DZEDED) plus the fact that the DZED sequence with its fewer stages yielded better viscosity values and almost equal brightness values. Further, the brightness obtained by the DZED sequence is almost equal to the brightness obtained in the more costly prior art CEDED sequence (cf. Ex. 10 and Ex. 5). The DZED (Ex. 8) produced better results than that of ZDED (Ex. 10) at same chemical charge. The DZED produced 84.7% GZ brightness while ZDED produced only 79.0% GZ. The same result has been experienced in the DZEDED (Ex. 11) and ZDEDED (Ex. 12) examples. The DZ sequence also generated less TOCl than that of ZD sequence.

Table 2

Example	Bleaching Sequence	Chemical Charge (% on Oven Dried (OD) Pulp)				Total Chloride on Pulp (ppm)	Organic Chloride on Pulp (ppm)	Pulp Brightness (GE %)	Pulp Viscosity (cP)	C Factor
6	ZED	Z	E	D		ND(1)	ND	78.9 (N.D.)**	16.5	0
		---	---	---						
7	ZEDED	2	2.5	1.5		75*	57	87.9 (85.2)	14.4	0
		Z	E	D	E D					
8	DZED	---	---	---	---	ND	ND	84.7 (N.D.)	19.0	0.11
		1.37	1.0	2.5	0.7					
9	DZED	D	Z	E	D	101*	80	86.5 (82.7)	16.8	0.11
		---	---	---	---					
10	ZDED	1.4	1.0	2.5	1.0	ND	ND	79.0 (N.D.)	23.5	0.11
		Z	D	E	D					
11	DZEDED	---	---	---	---	77*	65	89.0 (85.3)	15.8	0.11
		1.37	1.0	2.5	0.7					

-14-

Table 2, continued

Example	Bleaching Sequence	Chemical Charge (% on Oven Dried (OD) Pulp)				Total Chloride on Pulp (ppm)	Organic Chloride on Pulp (ppm)	Pulp Brightness (GE %)	Pulp Viscosity (CP)	C Factor
12	ZDEDED	Z	D	E	D	D	140	87.2 (84.2)	21.8	0.11
		---	---	---	---	---				
		1.0	1.37	2.5	0.7	0.5				
13	ODZED	D	Z	E	D	D	70	86.6 (84.0)	14.4	0.14
		---	---	---	---	---				
		1.2	0.5	2.0	0.7					

(1) N.D.: not determined.

(2) Kappa NO. of 32.3

\* Estimated by the sum of inorganic and organic chlorides.

\*\* Reverted brightness.



EXAMPLES 14-19

Examples 14-16 employed Southern softwood kraft pulp having a Kappa number of 27.3. Table 3 shows certain properties of the resultant bleached pulps. From Table 3 it  
5 is noted that enhancement of the extraction stage (e.g.  $E_O$ ,  $p$ , or  $E_{O+p}$  in the DZED bleaching sequence permits the use of less chlorine dioxide in the D stage and produces a pulp of substantially equivalent brightness and viscosity to the pulp produced using a DZED sequence without such enhance-  
10 ment.

Examples 17-19 employed Southern hardwood kraft pulp having a Kappa of 14.9. Table 3 also shows the properties of the resultant bleached pulps of these examples. These pulps showed high viscosity and good brightness values  
15 as well as relatively low TOCl values employing total chlorine dioxide amounts less than the total chlorine dioxide amounts employed in obtaining substantially equivalent brightness and viscosity values for softwood pulp. For either softwood or hardwood pulps, the total chlorine diox-  
20 ide employed in these Examples 14-19 is substantially less than the total chlorine dioxide employed to obtain equivalent brightness and viscosity values without employing ozone after chlorination.

TABLE 3

Example	Bleaching Sequence	Pulp Kappa No.	C Factor	% Chemical on Pulp			Organic Chloride On Pulp (ppm)	Brightness (% G.E.)	Viscosity (cP)
				<u>D</u>	<u>Z</u>	<u>Ep</u>			
14	DZE <sub>p</sub> D	27.3	0.12	1.24	0.6	3% NaOH 0.5% H <sub>2</sub> O <sub>2</sub>	110	86.3 (ND)	16.2
				<u>D</u>	<u>Z</u>	<u>EO</u>			
15	DZE <sub>O</sub> D	27.3	0.12	1.24	0.6	3	140	86.0 (ND)	16.2
				<u>D</u>	<u>Z</u>	<u>EO+p</u>			
16	DZE <sub>O+p</sub> D	27.3	0.12	1.24	0.6	3% NaOH 0.5% H <sub>2</sub> O <sub>2</sub>	110	87.0 (ND)	14.7
				<u>D</u>	<u>Z</u>	<u>EO</u>			
17	DZE <sub>O</sub> D	14.9	0.12	0.7	0.4	1.5	120	85.9 (82.1)	18.6
				<u>D</u>	<u>Z</u>	<u>Ep</u>			
18	DZE <sub>p</sub> D	14.9	0.12	0.7	0.4	1.5	130	85.8 (81.7)	18.8
				<u>D</u>	<u>Z</u>	<u>EO+p</u>			
19	DZE <sub>O+p</sub> D	14.9	0.12	0.7	0.4	1.5	120	86.5 (82.1)	18.6

EXAMPLES 20-54

A laboratory D<sub>C</sub>ZED bleaching sequence was studied using a central composite statistically designed experiment which varied D<sub>C</sub> stage chlorination factor and fraction of chlorine dioxide charge, and ozone charge in the Z stage. The pulp had a Kappa number of 32.3. The results are shown in Table 4. In Table 4, Examples 24, 29-32, 34, 38-41, 45, 47-49 and 54 represent actual run data which served as the basis for the statistically designed experimental data of the remaining examples. From this data it may be concluded that to obtain a pulp brightness of about 85% GE or higher and a viscosity of at least about 18 cP, the preferred chlorination factor is about 0.12 and the ozone charge is about 1.1%. This holds true for chlorine dioxide which includes up to about 20% chlorine. All of the pulps of Examples 20-38 showed low TOCl and AOX values, each being within present regulatory limits. Most surprisingly, however, it was found that by using a lower chlorination factor (e.g. 0.12) which results in substantial savings in the cost of chlorine-based bleaching agent, one can use ozone percentages of about 1% and obtain a three-fold reduction in AOX values.

-18-

TABLE 4 (3)

Example	Bleaching Sequence	C Factor (1)	ClO <sub>2</sub> (%)	(% on D(4))	% Charge oven dried C(4)	Z	(OD) pulp D(2)	Total Organic Cl on pulp (ppm)	AOX Total (kg/BDT)	Pulp Brightness (% GE)	Viscosity (CP)
20	DZED	0.037	100	1.20	0.00	0.9	1.0	60	0.1	55.0	23.5
21	D <sub>C</sub> ZED		95	1.14	0.06	1.0	1.0	40	0.1	58.0	22.2
22	D <sub>C</sub> ZED		90	1.08	0.12	1.0	1.0	65	0.1	59.0	22.0
23	D <sub>C</sub> ZED		80	0.96	0.24	1.1	1.0	50	0.2	62.0	21.0
24	D <sub>C</sub> ZED		50	0.60	0.60	0.8	1.0	360	0.5	47.0	21.8
25	DZED	0.07	100	2.26	0.00	1.2	1.0	20	0.2	76.0	20.2
26	D <sub>C</sub> ZED		95	2.14	0.12	1.3	1.0	20	0.2	80.0	20.0
27	D <sub>C</sub> ZED		90	2.03	0.23	1.3	1.0	50	0.3	79.0	19.5
28	D <sub>C</sub> ZED		80	1.81	0.45	1.3	1.0	100	0.4	78.0	19.0
29	D <sub>C</sub> ZED		80	1.81	0.45	1.0	1.0	240	0.6	65.1	20.1
30	D <sub>C</sub> ZED		80	1.81	0.45	0.5	1.0	440	0.4	46.5	25.7
31	D <sub>C</sub> ZED		20	0.45	1.81	0.5	1.0	725	1.8	43.8	23.8
32	D <sub>C</sub> ZED		20	0.45	1.81	1.1	1.0	220	1.5	63.0	18.8
33	DZED	0.12	100	3.88	0.00	1.1	1.0	100	0.4	85.0	18.6
34	DZED		100	3.88	0.00	0.8	1.0	170	0.7	79.6	21.9

TABLE 4, continued

Example	Bleaching Sequence	C Factor (1)	ClO <sub>2</sub> (%)	(% On D(4))	% Charge oven dried (OD) C(4)	pulp D(2)	Organic Cl on pulp (ppm)	AOX Total (kg/BDT)	Pulp Brightness (% GE)	Viscosity (cP)
35	D <sub>C</sub> 2ED		95	3.67	0.19	1.1	125	0.5	85.0	18.5
36	D <sub>C</sub> 2ED		90	3.49	0.39	1.1	150	0.6	84.0	18.0
37	D <sub>C</sub> 2ED		80	3.10	0.78	1.1	200	0.8	83.0	17.8
38	D <sub>C</sub> 2ED		50	1.94	1.94	0.3	370	3.0	72.7	18.6
39	D <sub>C</sub> 2ED		50	1.94	1.94	0.8	380	2.7	72.3	18.9
40	D <sub>C</sub> 2ED		50	1.94	1.94	1.3	255	2.3	84.7	15.9
41	D <sub>C</sub> 2ED		0	0.00	3.88	0.8	440	4.4	67.4	17.4
42	D <sub>C</sub> 2ED	0.17	100	5.50	0.00	0.7	100	0.9	87.5	20.2
43	D <sub>C</sub> 2ED		95	5.22	0.28	0.7	125	1.0	87.5	20.0
44	D <sub>C</sub> 2ED		90	4.95	0.55	0.7	150	1.2	87.0	19.5
45	D <sub>C</sub> 2ED		80	4.40	1.10	1.1	170	2.5	88.1	15.8
46	D <sub>C</sub> 2ED		80	4.40	1.10	0.7	200	1.4	86.0	19.1
47	D <sub>C</sub> 2ED		80	4.40	1.10	0.5	280	3.2	84.2	21.4
48	D <sub>C</sub> 2ED		20	1.10	4.40	1.1	250	6.9	86.3	14.9

-20-

TABLE 4. Continued

Example	Bleaching Sequence	C Factor	C102 (%)	(% on D(4))	% Charge over dried (OD) $\frac{C(4)}{2}$	pulp $\frac{D(2)}{D(4)}$	Organic Cl on pulp (ppm)	AOX Total (kg/BDT)	Pulp Brightness (% GE)	Viscosity (cP)
49	D <sub>C</sub> ZED		20	1.10	4.40	0.5	1.0	5.9	76.9	19.8
50	DZED	0.20	100	6.46	0.00	0.3	1.0	1.3	88.0	25.2
51	D <sub>C</sub> ZED		95	6.14	0.32	0.3	1.0	1.5	88.0	24.8
52	D <sub>C</sub> ZED		90	5.81	0.65	0.3	1.0	1.8	87.5	24.6
53	D <sub>C</sub> ZED		80	5.17	1.29	0.3	1.0	2.0	87.0	24.2
54	D <sub>C</sub> ZED		50	3.23	3.23	0.8	1.0	5.7	88.8	15.5

- (1) Kappa number of 32.3.  
 (2) Preceded by an alkaline extraction with 3% sodium hydroxide charge.  
 (3) Based on predicted data, except examples 24, 29-32, 34, 38-41, 45, 47-49 and 54.  
 (4) Based on effective chlorine

Table 5 shows the adsorbed organic halogens (AOX) generated in the bleaching stages of the sequences of Examples 1-3, 9, 11 and 14. Examples 1 and 2 showed AOX levels in excess of the desired 2.0 kg per ton of wood pulp. A pre-delignification stage, as in Example 3, produced effluent within the 2.0 kg level, but Example 3 had high levels of chloride in the wood pulp (see Table 2). Examples 9, 11 and 14 involved stages of chlorine dioxide bleaching followed by ozonation. Example 9 represented a DZED sequence, and produced effluent well below the targeted AOX level. Example 14 showed that pre-delignification with oxygen can improve the AOX level, but at the expense of the cost associated with the additional stage (O).

Table 5

Example	Sequence	AOX (kg/BDT) in Effluent Stages						Total
		D-C	E <sub>O+p</sub>	D				
1	D-CE <sub>O+p</sub> D	0.86	1.3	0.04				2.20
2	D-CE <sub>O+p</sub> DED	0.86	1.3	0.04	E	D		2.23
3	OD-CE <sub>O+p</sub> D	0.71	0.5	0.06				1.27
9	DZED	0.13	0.2	0.06	0.04			0.43
11	DZED	0.13	0.2	0.06	0.04	0.1	0.1	0.63
14	ODZED	0.17	0.09	0.04	0.02			0.32



Experimental data were subjected to regression analysis of pulp brightness, viscosity and TOCl on chlorination factor, fraction of chlorine dioxide charge in the  $D_C$  stage and ozone charge in the second stage ( $D_C$ ZED sequence).

5 The results are depicted graphically in Figures 1-5. From these Figures, at 100% chlorine dioxide in the  $D_C$  stage, it may be seen that as one accepts a lower viscosity, equal amounts of ozone can be employed with lower quantities of chlorine dioxide ("C" factor) while still maintaining high  
10 brightness and low TOCl values. This relationship holds true when the chlorine dioxide charge includes up to 20% chlorine (see Figs. 4 and 5), the actual ranges being somewhat condensed when employing an 80/20 mixture of chlorine dioxide and chlorine.

15 It may be seen from the foregoing that the present invention provides for a method of preparation of kraft cellulosic wood pulp fibers for use in papermaking that reduces the total chloride residue in the wood pulp to less than 200 ppm and the AOX discharge per ton of wood pulp to  
20 less than 2.0 kg. In addition, the wood pulp has a brightness greater than 85% GE and a viscosity above about 14 centipoises. Also, the method is economical and readily adaptable to the current papermaking industry.

From the Examples, it will be noted that the  
25 percentage of ozone, based on oven dry weight of pulp, employed varies as a function of the "C" factor, the effective ratio of "C" factor to % ozone being between about 0.11 and 0.6, and preferably between about 0.2 and 0.6 for minimizing the TOCl and AOX values while maximizing the bright-  
30 ness and viscosity values of the pulp.

#### EXAMPLES 55-58

In Table 6, there are shown the results of two runs in which the dioxin content of the pulp and effluent was determined. Southern pine kraft pulp, with 1% reject  
35 from cooking, having a Kappa No. of 30.3 and a viscosity of 35 cP was employed in all examples. In Example 55, a control run indicative of prior art bleaching sequences that do

not employ ozone, but which do include oxygen and peroxide enhanced extraction, there was no detectable tetrachlorodibenzodioxin (TCDD) in the final bleached pulp. In this example, there was detected 2.5 ppt of tetrachlorodibenzofuran (TCDF). In the effluent from this run there was detected 2.5 ppt and 30.3 ppt of TCDD and TCDF, respectively,

In Example 58, a D<sub>C</sub>ZE<sub>O</sub>D sequence in accordance with the present invention, there were no dioxins (TCDD or TCDF) detected in either the pulp or the effluent.

TABLE 6  
DETERMINATION OF DIOXINS

Example	Bleaching Sequences	Conditions				Brightness (% GE)	AOX (kg/TP)	TOCl (ppm)	Dioxins (unit = ppt on pulp)		
		D - C	E <sub>o</sub> +p	D	D				TCDD	TCDF	
55	D-CE <sub>o</sub> +pD	1.53%-2.67%	3% NaOH			86.5 (81.0)	2.78	210	Pulp	ND	2.5
			0.4% H <sub>2</sub> O <sub>2</sub>	0.8%					Effluent	2.5	30.3
56	DE <sub>o</sub> DP	D	E <sub>o</sub>	D	P	85.0 (82.4)	0.90	200	Pulp	ND	1.762
57	DZE <sub>o</sub> D	2.08%	2%	0.8%	0.57%						
		D	Z	E <sub>o</sub>	D	85.3 (80.0)	0.49	100	Pulp	ND	ND
58	D <sub>C</sub> ZED	1.27%	1.0%	2%	0.8%				Effluent	ND	ND
		D	Z	E	D	83.0	1.35	200	Pulp	ND	ND
									Effluent	ND	ND
		1.0%-0.71%	1.0%	2.5%	0.8%						

-25-

Remarks:

1. First chlorination stage was conducted at 45°C for 30 minutes.
2. E<sub>o</sub>, E<sub>o</sub>+p was conducted in Quantum Reactor at 10% CSC, 75°C for 1 hour at 45 psig O<sub>2</sub> pressure, gradually reduced to 0 psig.
3. Final D stage was conducted at 10% CSC, 70°C for 2.5 hours.
4. Not detectable.

EXAMPLE 59

Table 7 presents the results of a bleaching sequence in accordance with the present invention in which the ozonated pulp at a pH of 12.7 was processed directly to an alkaline extraction stage (enhanced with oxygen) without an intervening water washing (ZE<sub>0</sub>). In this Example 59, the GE brightness of the pulp and its viscosity were lower than when the pulp was washed with water between the Z and E stages, but these parameter values were still in a range that is acceptable for certain pulps. The simplification of this process can lead to a capital reduction. The TOCl of the pulp was 128 ppm, well below present regulated standards.

TABLE 7  
DZED SEQUENCE UNDER ALKALINE OZONATION CONDITIONS

<u>Example</u>	<u>Sequence</u>	<u>Conditions</u>		<u>Brightness</u> <u>% GE</u>	<u>Viscosity</u> <u>CP</u>	<u>TOCl</u> <u>ppm</u>
59	D(zE <sub>O</sub> )D	D	Z	E <sub>O</sub>	D	
		1.15%	3% NaOH	3%	0.8%	
			34% consistency			
				81.3 (77.5)	11	128

WHAT IS CLAIMED IS:

Claim 1. A method for the treatment of kraft pulp in preparation for its use in papermaking comprising the steps of

5                   contacting said pulp while dispersed in an aqueous medium with an initial charge of a chlorine-based bleaching agent selected from the group consisting of chlorine dioxide, and mixtures of chlorine dioxide and chlorine, wherein the total chlorine dioxide present in said charge represents between  
10                   about 100% and about 50% of the total charge, expressed as effective chlorine, the remainder of said charge being chlorine, said bleaching agent producing a substantial quantity of chlorine-containing moieties that are insoluble in an acid  
15                   medium,

                  thereafter, and prior to any intervening treatment of said pulp other than a wash, contacting said pulp with ozone, said ozone being present in an amount which provides a ratio of "C" factor to %  
20                   ozone, based on dry weight of pulp, of between about 0.03 and about 0.6 for a period of time sufficient to cause said ozone to oxidize substantial quantities of said chlorine-containing moieties and render the same soluble in the acid  
25                   medium of said pulp,

                  thereafter, separating said solubilized chlorine-containing moieties from said pulp, and

                  whereby there is obtained a pulp having substantially lower chlorine content, essentially no tetrachlorodibenzodioxin, essentially no tetrachlorodibenzofuran, and substantially equivalent  
30                   brightness and viscosity as the same pulp which has been bleached employing conventional chlorine-

based bleaching sequences.

Claim 2. The method of Claim 1 wherein said separation of said solubilized chlorine-containing moieties from said pulp comprises washing said pulp with an aqueous medium.

Claim 3. The method of Claim 2 and including the further and subsequent treatment of said washed pulp with an alkaline extraction.

Claim 4. The method of Claim 3 including the step of enhancing said extraction by the addition of oxygen, peroxide or a combination thereof.

Claim 5. The method of Claim 1 wherein the total quantity of chlorine dioxide and/or chlorine applied to said pulp is sufficient to provide a "C" factor of greater than about 0.04 and less than about 0.20, based on oven dried  
5 pulp.

Claim 6. The method of Claim 3 and including the further and subsequent treatment of said pulp with chlorine dioxide.

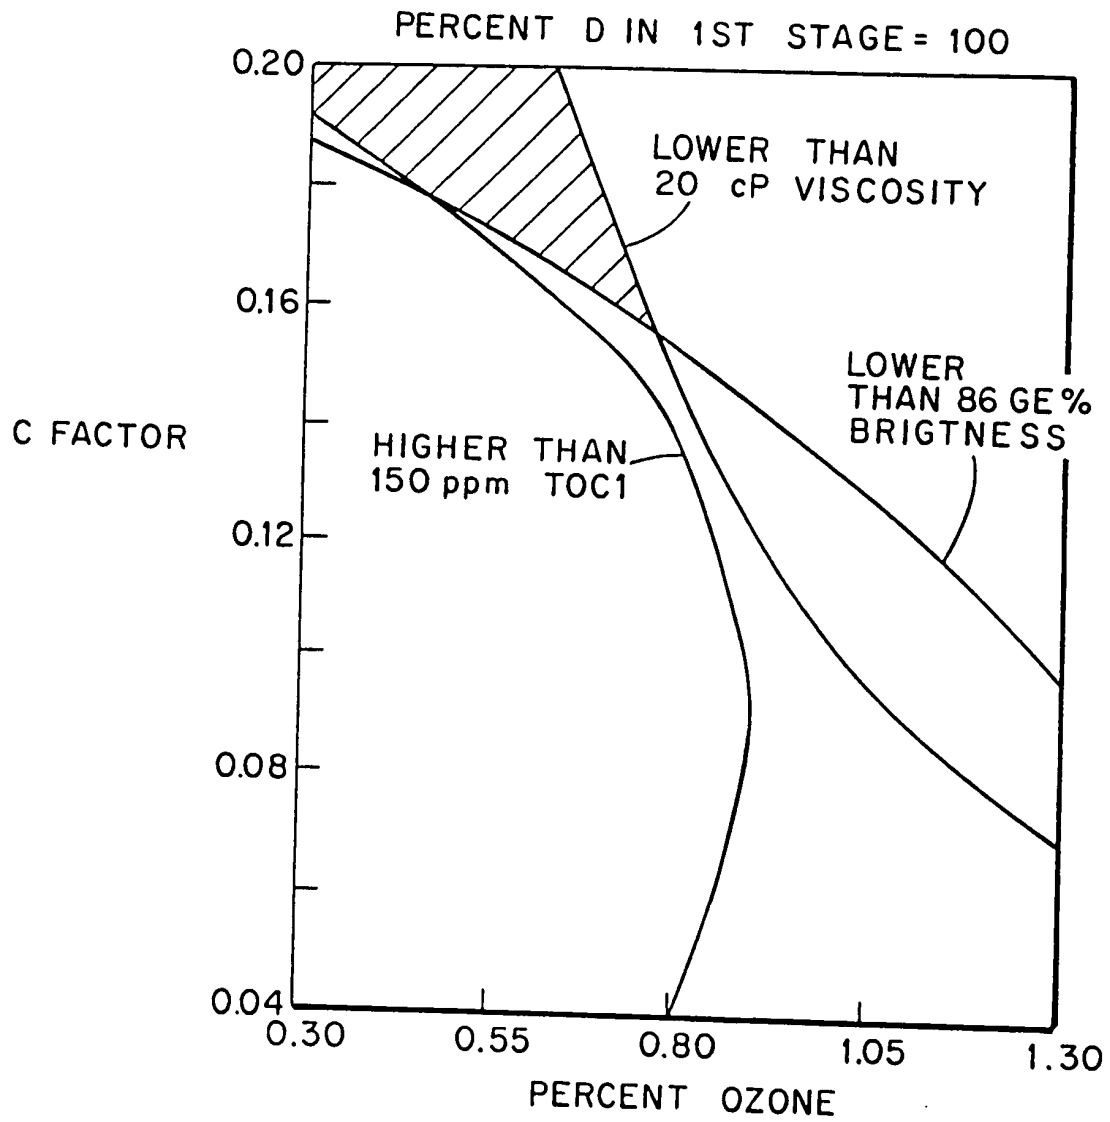
Claim 7. A bleaching sequence for kraft pulp consisting of the stages D<sub>C</sub>ZED in that order.

Claim 8. A cellulosic kraft pulp suitable for papermaking purposes, said pulp being bleached through the use of chlorine dioxide or a mixture of chlorine dioxide and chlorine, being essentially free of tetrachlorodibenzodioxin  
5 or tetradibenzofuran, having a total organic chloride content of less than about 200 ppm, based on pulp, and having a total adsorbed organic halogen content of less than about 2 kg/ton, based on pulp.



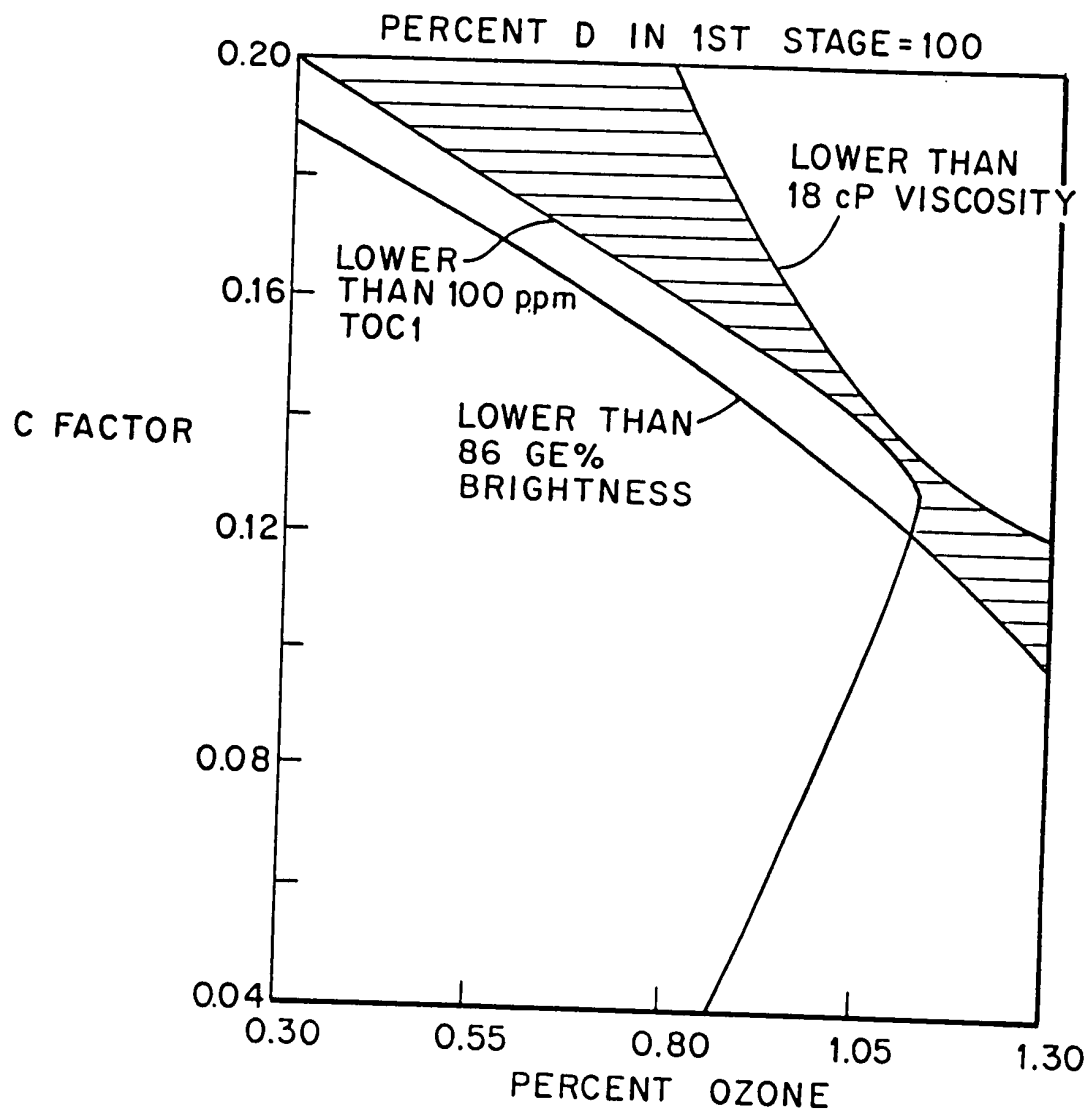


1/5

**Fig. 1**

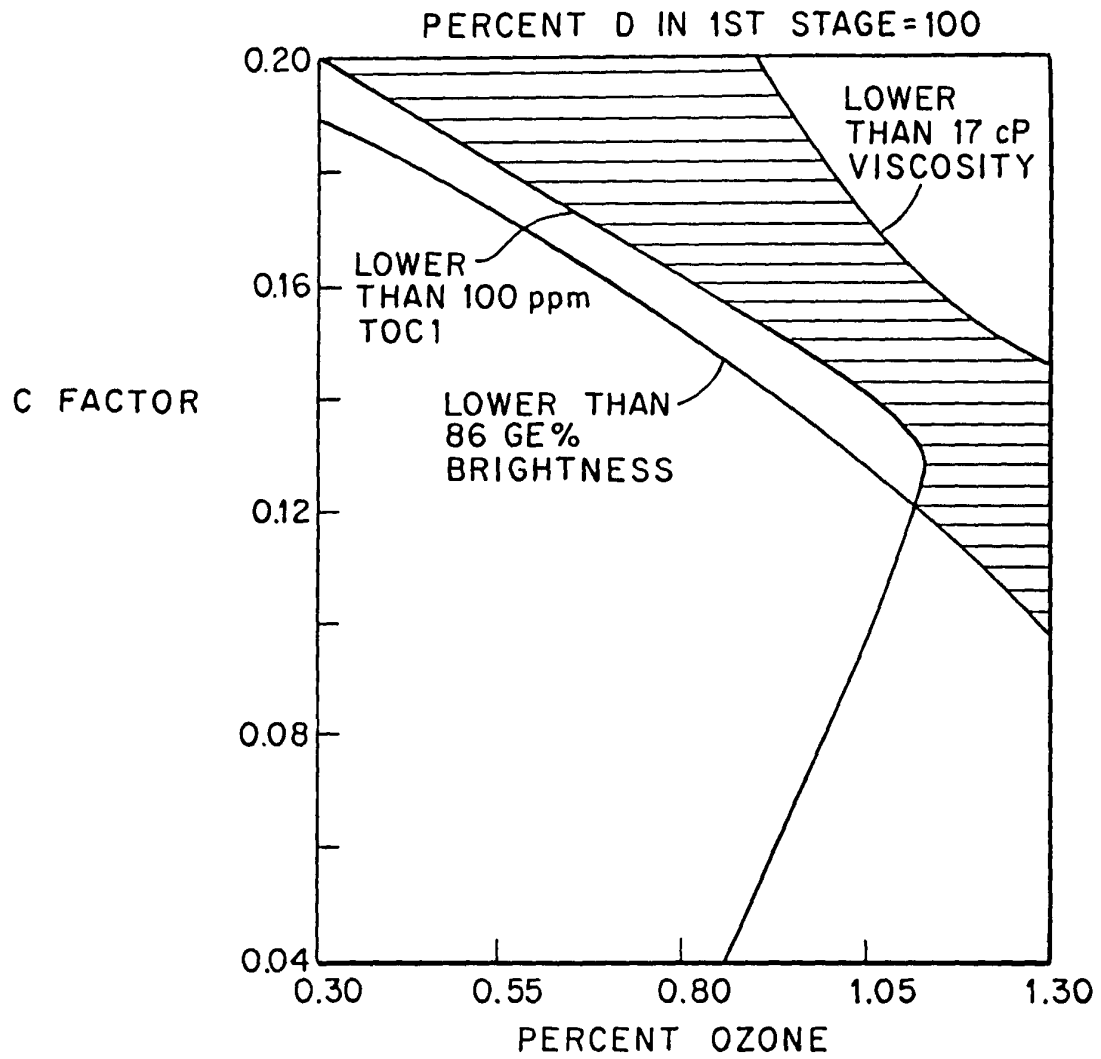


2/5

Fig. 2

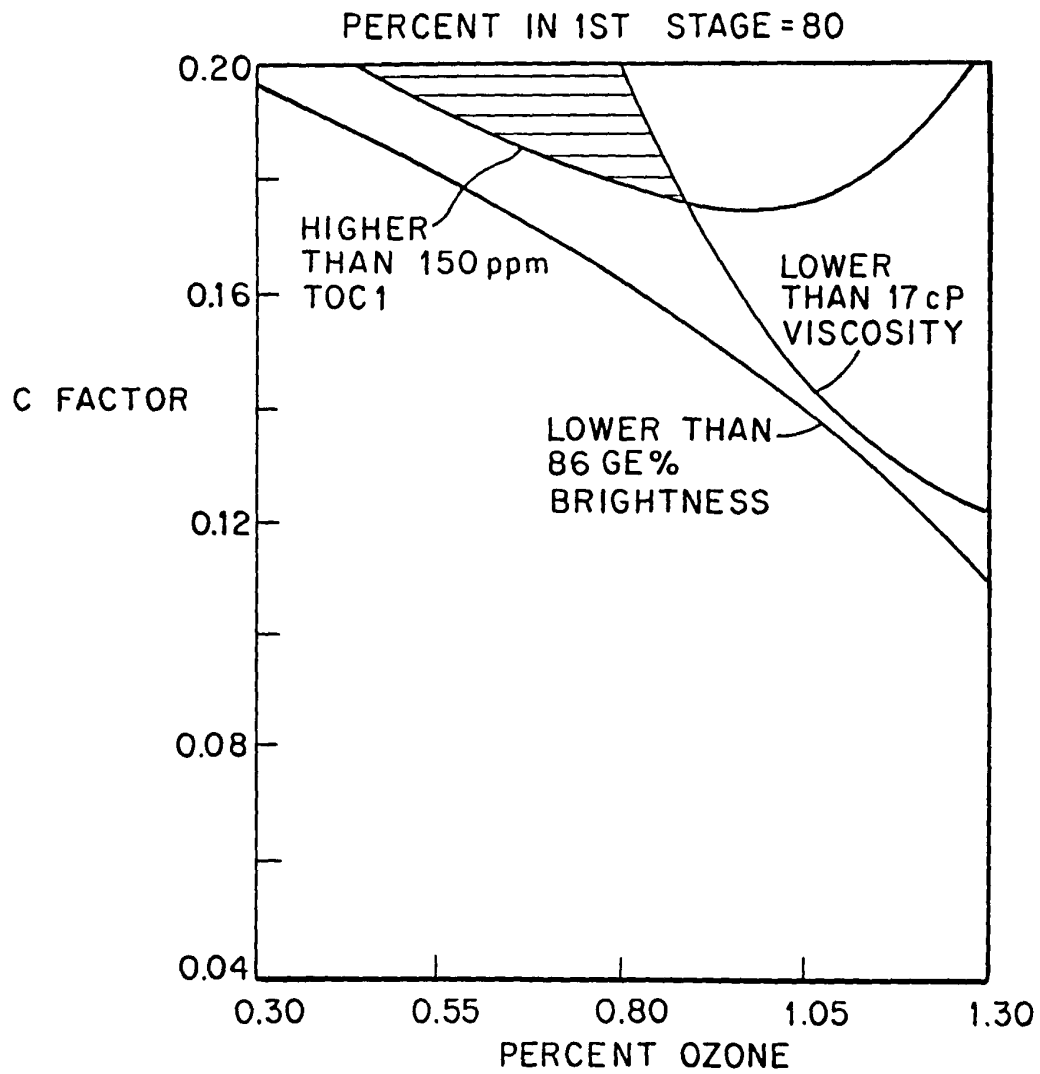


3/5

**Fig. 3**



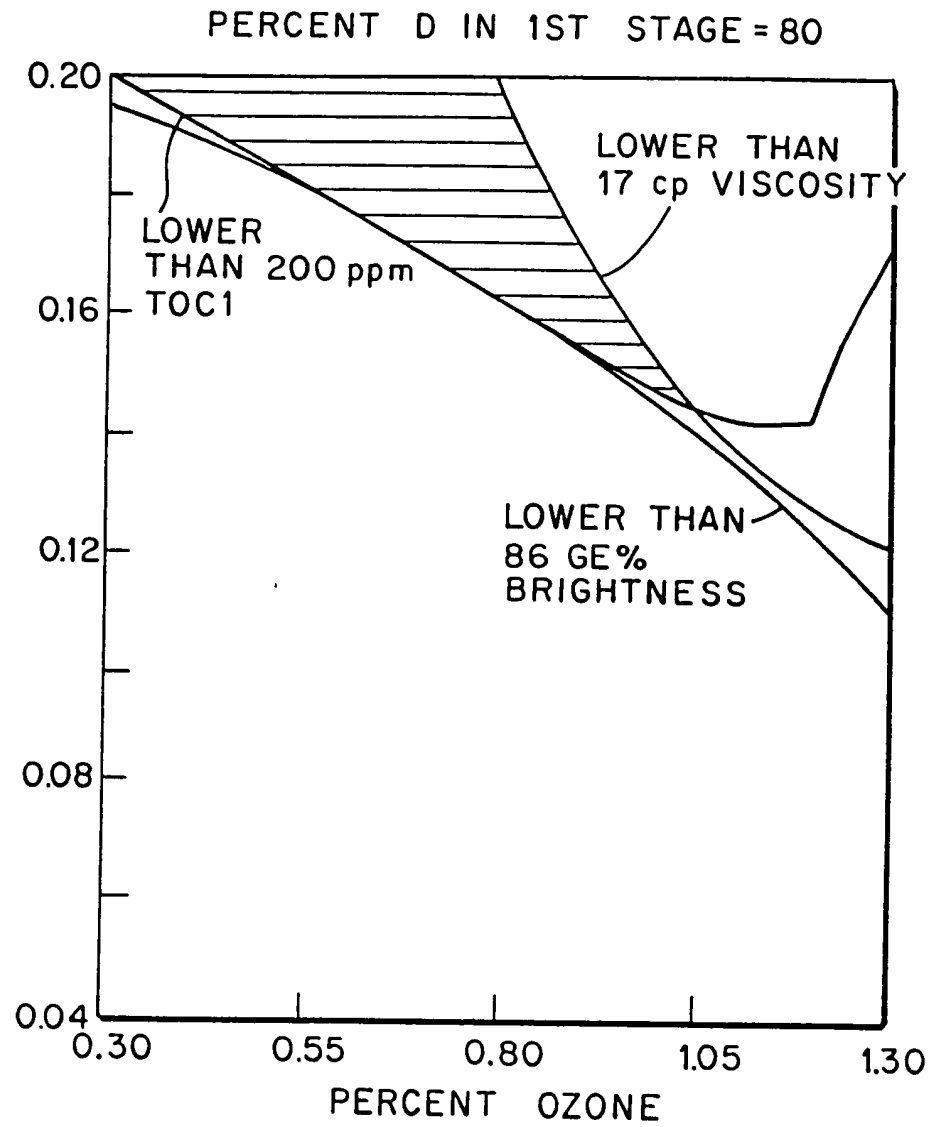
415

**Fig. 4**





5/5

Fig. 5



# INTERNATIONAL SEARCH REPORT

International Application No. PCT/US91/05834

<b>I. CLASSIFICATION F SUBJECT MATTER</b> (if several classification symbols apply, indicate all) * According to International Patent Classification (IPC) or to both National Classification and IPC IPC(5): D21C 9/14, 9/153, 9/16 U.S. CL.: 162/65, 78, 89						
<b>II. FIELDS SEARCHED</b> <div style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black; margin: 5px 0;">Minimum Documentation Searched ?</div> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%; border-bottom: 1px solid black;">Classification System</td> <td style="border-bottom: 1px solid black;">Classification Symbols</td> </tr> <tr> <td style="height: 40px; vertical-align: bottom; border: 1px solid black;">U.S.</td> <td style="border: 1px solid black;">162/65, 66, 67, 74, 78, 88, 89</td> </tr> </table> <div style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black; margin: 5px 0;">Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched *</div>			Classification System	Classification Symbols	U.S.	162/65, 66, 67, 74, 78, 88, 89
Classification System	Classification Symbols					
U.S.	162/65, 66, 67, 74, 78, 88, 89					
<b>III. DOCUMENTS CONSIDERED TO BE RELEVANT *</b>						
Category *	Citation of Document, ** with indication, where appropriate, of the relevant passages **	Relevant to Claim No. **				
X Y	Journal of Pulp and Paper Science, (GRANUM et al.) March 1984, Pages J25-J29, "INFLUENCE OF BLEACHING CHEMICALS AND SEQUENCES ON SOME PULP PROPERTIES OF SULPHITE PULPS" See Page J-26, Column 3.	$\frac{7}{1-8}$				
Y	Paper Technology, (Technical News) January 1989 Page 36, "SWADES INVESTIGATE DIOXIN". See entire article.	1-8				
X Y	Pulp and paper Canada, (BERRY et al.) August 1989, pages 48-58, "Toward Preventing The Formation of Dioxins During Chemical Pulp Bleaching." See Figures 2 and 3.	$\frac{8}{1-8}$				
Y	US,A, 4,568,420 (NONNI) 04 FEBRUARY 1986 See Abstract	4				
<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p>* Special categories of cited documents: **</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 48%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"Δ" document member of the same patent family</p> </div> </div>						
<b>IV. CERTIFICATION</b>						
Date of the Actual Completion of the International Search		Date of Mailing of this International Search Report				
28 AUGUST 1991		19 NOV 1991				
International Searching Authority		Signature of Authorized Officer				
ISA/US		 STEVE ALVO NGUYEN HOC-HO INTERNATIONAL DIVISION				

